

6W

1. Basic parameter

Warranty	5 years
Wattage	6W
Size	L118.5*W22*H44.6mm
Cutout	/
Installation	Magnetic Track
IP Grade	IP20
Beam Angle	24°/38
Main Material	Aluminum+pc
Finished Color	Sand White /Sand Black
Working Temperature	-10°C~40°Cs
Product Standards	IEC(or EN)60598-1
Certification	ERP

4. Driver parameter

Driver	No Dimming LTECH No flicker
Input	DC 48V
Output	DC9-42V 150mA,6W
Typical Efficiency	≥94%
Certificat	/
Ta/Tc,Surge	45°C/75°C, 1000V

Driver	Zigbee Dimming /
Input	/
Output	/
Typical Efficiency /	
Certificat	/
Ta/Tc,Surge	/

2. LED parameter




LED Brand&Type	OSRAM 3030 6V 1W
CRI	≥90
CCT	3000K 4000K 5000K
Light Efficiency	95.12lm/w
LED chip numbers	6PCS
Lumen	3000K: 524.8lm 4000K:536.1lm 5000K:547.1lm

3. Packaging parameter

Quatity	48pcs/ctn
N.W.	98g*48pcs
G.W.	5.9kg/ctn
Inner Box	L50*W28*H134mm
Outer Box	L28*W21.5*H19cm
Volume	0.01144m³/ctn
Weight (Lamp +inner box+EPE)	116g/pcs
Weight (Lamp)	98g/pcs

Driver	0-10V Dimming /
Input	/
Output	/
Typical Efficiency /	
Certificat	/
Ta/Tc,Surge	/

Driver	DALI Dimming /
Input	/
Output	/
Typical Efficiency /	
Certificat	/
Ta/Tc,Surge	/

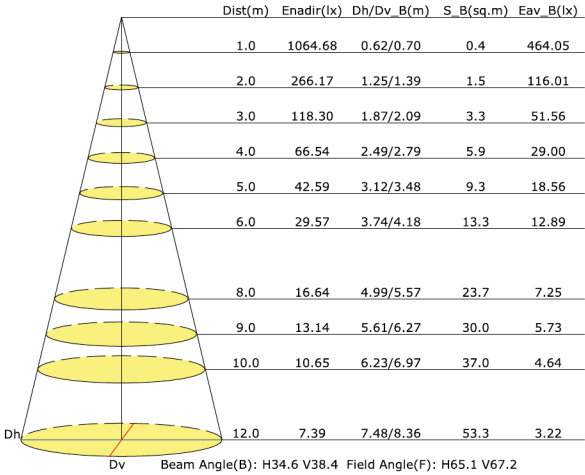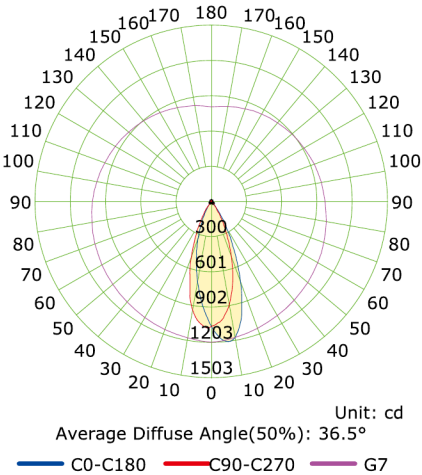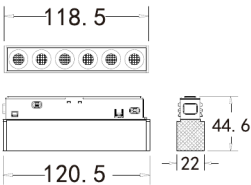

Tips:Color temperature, lumen, beam angle and power all have errors of +10%, which belongs to the standard range.

12W

1. Basic parameter

Warranty	5 years
Wattage	12W
Size	L235*W22*H44mm
Cutout	/
Installation	Magnetic Track
IP Grade	IP20
Beam Angle	24°/38
Main Material	Aluminum+pc
Finished Color	SandWhite/Sand Black
Working Temperature	-10°C~40°Cs
Product Standards	IEC(or EN)60598-1
Certification	ERP

4. Driver parameter

Driver	No Dimming LITECH No flicker
Input	DC 48V
Output	DC9-42V 300mA,12W
Typical Efficiency	≥94%
Certificat	/
Ta/Tc,Surge	45°C/75°C, 1000V




Driver	Zigbee Dimming /
Input	/
Output	/
Typical Efficiency /	
Certificat	/
Ta/Tc,Surge	/

2. LED parameter

LED Brand&Type	OSRAM 3030 6V 1W
CRI	≥90
CCT	3000K 4000K 5000K
Light Efficiency	88.59lm/w
LED chip numbers	12PCS
Lumen	3000K: 999.6lm 4000K: 1020.1lm 5000K:1045.3lm

3. Packaging parameter

Quatity	48pcs/ctn
N.W.	173g*48pcs
G.W.	10.1kg/ctn
Inner Box	L50*W28*H248mm
Outer Box	L32*W26*H25cm
Volume	0.0208m³/ctn
Weight (Lamp +inner box+EPE)	199g/pcs
Weight (Lamp)	173g/pcs

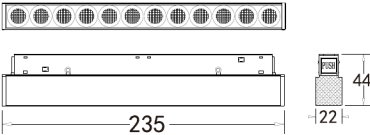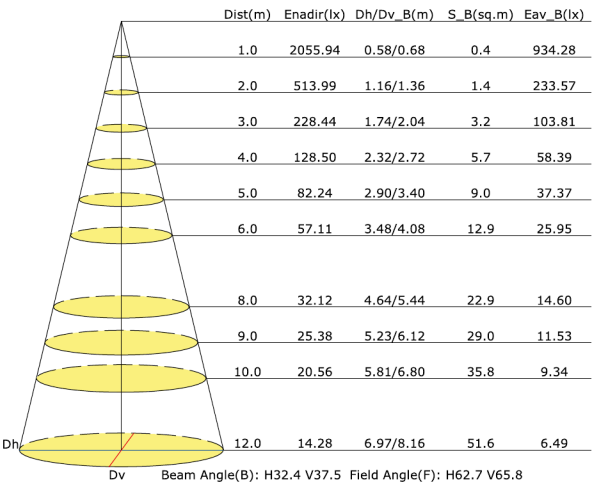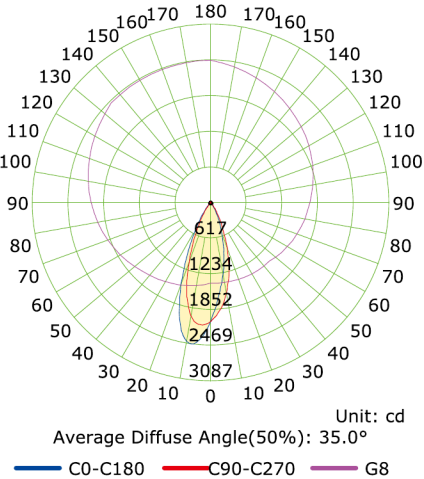

24W

1. Basic parameter

Warranty	5 years
Wattage	24W
Size	L462*W22*H44mm
Cutout	/
Installation	Magnetic Track
IP Grade	IP20
Beam Angle	24°/38
Main Material	Aluminum+pc
Finished Color	Sand White /Sand Black
Working Temperature	-10°C~40°Cs
Product Standards	IEC(or EN)60598-1
Certification	ERP

4. Driver parameter

Driver	No Dimming LITECH No flicker
Input	DC 48V
Output	DC9-42V 600mA,24W
Typical Efficiency	≥94%
Certificat	/
Ta/Tc, Surge	45°C/75°C, 1000V




Driver	Zigbee Dimming /
Input	/
Output	/
Typical Efficiency	/
Certificat	/
Ta/Tc, Surge	/

2. LED parameter

LED Brand&Type	OSRAM 3030 6V 1W
CRI	≥90
CCT	3000K 4000K 5000K
Light Efficiency	89.3lm/w
LED chip numbers	24PCS
Lumen	3000K:2012.3lm 4000K: 2057.9lm 5000K:2102.9lm

3. Packaging parameter

Quatity	36pcs/ctn
N.W.	239g*36pcs
G.W.	14.2kg/ctn
Inner Box	L50*W28*H477mm
Outer Box	L49*W32.5*H19cm
Volume	0.03026m³/ctn
Weight (Lamp +inner box+EPE)	381g/pcs
Weight (Lamp)	339g/pcs

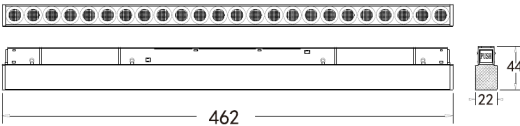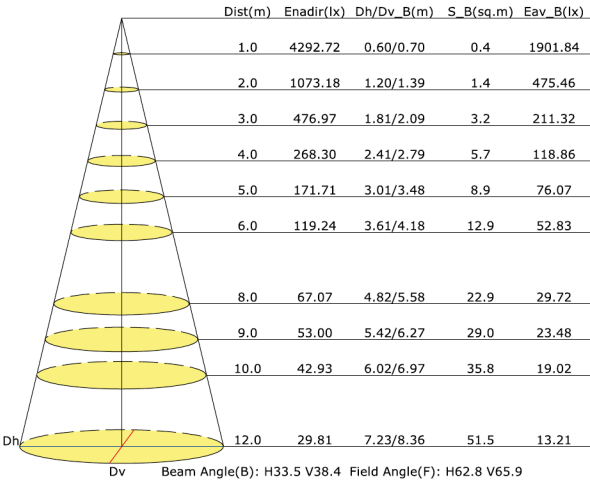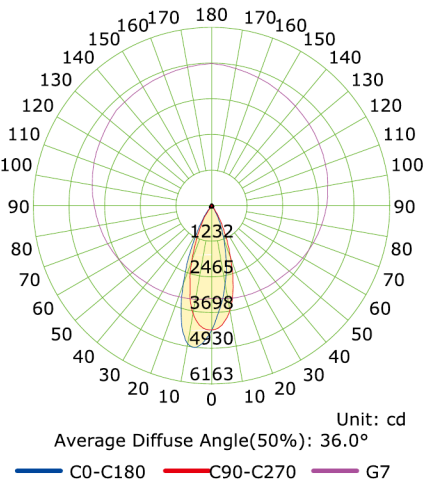

Tips:Color temperature, lumen, beam angle and power all have errors of +10%, which belongs to the standard range.