


12W


Basic parameter

Warranty:	5 years
Wattage:	12W
Size	L306*W22*H44mm
Cutout	/
Installation	Magnetic Track
IP Rating	IP20
Beam Angle	110°
Fitting Material	Aluminum+pc
Finish Color	Sand White /Sand Black
Working Temperature	-10℃~40℃s
Product Standards	IEC(or EN)60598-1
Certification	ERP



Driver parameter

Driver Brand & Type	LTECH
Input	DC 48V
Output	DC9-42V 300mA
Powerrating	12W
Power Factor	/
Typical Efficiency	≥94%
Certificate	/
Ta/Tc	45℃/75℃
Surge	1000V




Light parameters

Led Brand&Type&CCT	OSRAM 2835 3V 0.5W
Ra	≥90
CCT	3000K 4000K 5000K
Luminaire Efficacy	84.11lm/W
Led chip numbers	48PCS
Lumen	3000K: 864.1Lm 4000K: 885.2Lm 5000K: 910.8Lm

Packaging parameter


Quality(pcs/Ctn)	48
N.W.(g*pcs)	199*48
G.W. (Kg/Ctn)	11.6
Inner Box(mm)	L50*W28*H322
Outer Box(CM)	L33.5*W32*H25
Volume(M³/Ctn)	0.0268
N.W : (g/pcs)	229
N.W : (g/pcs)	199

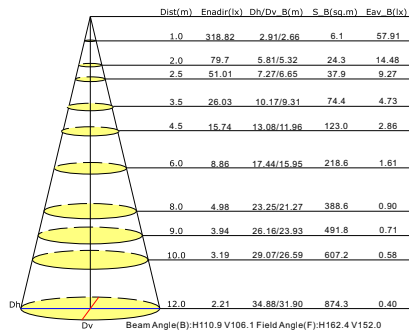

24W


Basic parameter

Warranty:	5 years
Wattage:	24W
Size	L601*W22*H44mm
Cutout	/
Installation	Magnetic Track
IP Rating	IP20
Beam Angle	110°
Fitting Material	Aluminum+pc
Finish Color	Sand White/Sand Black
Working Temperature	-10℃~40℃s
Product Standards	IEC(or EN)60598-1
Certification	ERP



Driver parameter

Driver Brand & Type	LTECH
Input	DC 48V
Output	DC9-42V 600mA
Powerrating	24W
Power Factor	/
Typical Efficiency	≥94%
Certificate	/
Ta/Tc	45℃/75℃
Surge	1000V



Light parameters

Led Brand&Type&CCT	OSRAM 2835 3V 0.5W
Ra	≥90
CCT	3000K 4000K 5000K
Luminaire Efficacy	80.15lm/W
Led chip numbers	96PCS
Lumen	3000K:1768.6Lm 4000K: 1821.7Lm 5000K:1858.1Lm

Packaging parameter

Quality(pcs/Ctn)	30
N.W.(g*pcs)	379*30
G.W. (Kg/Ctn)	13.4
Inner Box(mm)	L50*W28*H619
Outer Box(CM)	L63*W27*H19
Volume(M /Ctn)	0.0323
N.W : (g/pcs)	435
N.W : (g/pcs)	379

